

TEL. PLUGS FCC-68 FOR FLAT CABLE CAT. 6



6845 SERIES. 8 circuits modular plugs CAT 6.


General Features

- Available in 8/8 circuits
- Standard telephone plug 8 circuits FCC-68 RJ45
- Use flat cable Cat. 6 9104 series
- Insulation piercing termination
- 3 prongs for stranded wire
- Insert holder to easy assembly to the cable

Materials

- Insulator: Polycarbonate UL 94V-0
- Contact: Phosphor Bronze
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimension Information

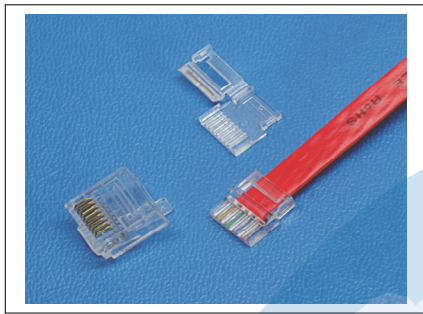

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Cable to plug tensile strength: > 6.20 Kgf
- Insertion force to jack: < 2.00 Kgf
- Withdrawal force from jack bar depressed: < 2.00 Kgf
- Durability: 1000 cycles

Part Number:

6845 - T- 08- 1
 1 2

1. Series

2. (T) Plating Options

- T = 4. 6μ" gold over nickel
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 7. 50μ" gold over nickel

