

# KEYSTONE JACK CAT 5e FCC-68



## 6879 SERIES. For panel Mounting.




### General Features

- Available in 8/8 circuits
- Meet specifications Cat 5e
- IDT termination for solid wire 22 to 26 AWG
- Accept standard plugs FCC-68
- 50  $\mu$  Selective gold plating in contact area
- Panel mounting

### Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.40 mm thickness phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant

### Dimensional Information

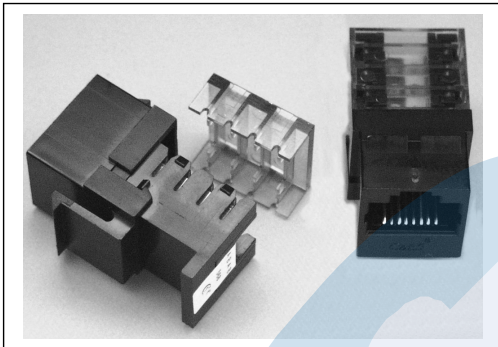

### Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 m $\Omega$
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 M $\Omega$

### Mechanical Features

- Durability: 750 cycles

Circuit Size	Part Number
8/8	6879- 7881

