

# TOP ENTRY PCB JACK FCC-68



## 7632 SERIES. Vertical PCB jack.

### General Features

- Available in 4/4, 6/4, 6/6 and 8/8 circuits
- Standard telephone jack FCC-68
- 15.70 mm. height
- Accept standard plugs FCC-68 type
- Selective gold plating with different finish
- Bifurcated plastic foot print

### Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 mm thickness phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant


### Dimensional Information

### Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Durability: 1000 cycles

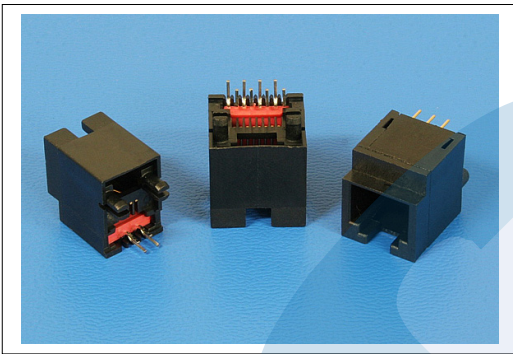

Version	Part Number		Dimensions		
	Standard	Cat. 5	A	B	C
4/4	7632 – T441	-	11.18 (0.440)	7.62 (0.300)	3.81 (0.150)
6/4	7632 – T641	-	13.21 (0.520)	10.16 (0.400)	3.81 (0.150)
6/6	7632 – T661	-	13.21 (0.520)	10.16 (0.400)	6.35 (0.250)
8/8	7632 – T881	7632 – T885	15.25 (0.600)	11.43 (0.450)	8.89 (0.350)

### T = Contact Plating

- T = 4. 6μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel
- T = 7. 50μ" gold over 50μ" nickel

