

SIDE ENTRY MULTI PORT PCB JACK FCC-68



7650 SERIES. Shielded right angle PCB jack. Single Level.


General Features

- Available in 8/8 circuits
- Standard telephone jack FCC-68
- Available in 2, 4, 5, 6, 8, 10 and 12 ports
- 13.85 mm. height
- Accept standard plugs FCC-68
- Selective gold with different plating
- Bifurcated plastic foot print
- With / without grounding tabs

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 mm round in phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

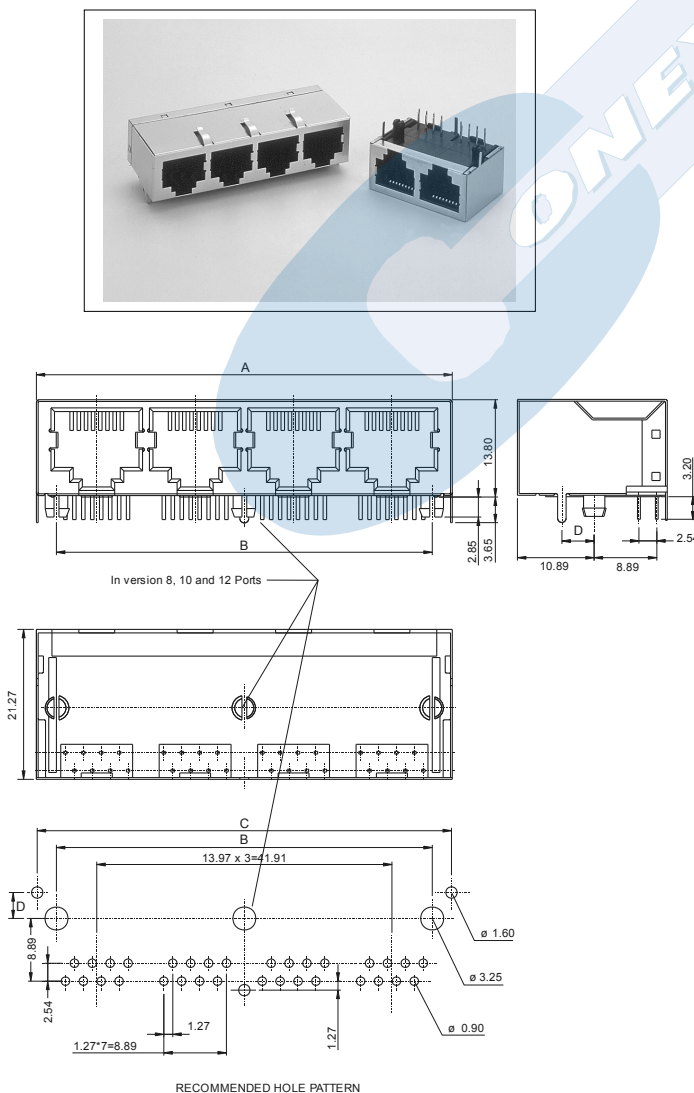

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 1000 cycles

Código:

7650 - T- XX- S
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 4. 6μ" gold over nickel
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 7. 50μ" gold over nickel

3. (XX) Ports number

- Available of 2 to 12 ports

4. (S) Options

- S = 1. D= 3.68 mm. Without grounding tabs
- S = 2. D= 3.68 mm. Upper grounding tabs.
- S = 3. D= 4.57 mm. Without grounding tabs
- S = 4. D= 4.57 mm. Upper grounding tabs
- S = 5. D= 3.68 mm. Upper and side G. Tabs
- S = 6. D= 4.57 mm. Upper and side G. Tabs

